


**NP12-45Ah 12V45Ah**




● **Specifications**

Nominal Voltage		12V
Rated capacity (10 hour rate)		45Ah
Dimensions	Length	197±2mm(7.76inch)
	Width	165±2mm(6.50inch)
	Height	170±2mm6.69inch)
	Total Height	170±2mm(6.69inch)
Approx. Weight		13.8kg(30.4lbs)±3%

● **Outer dimensions (mm)**

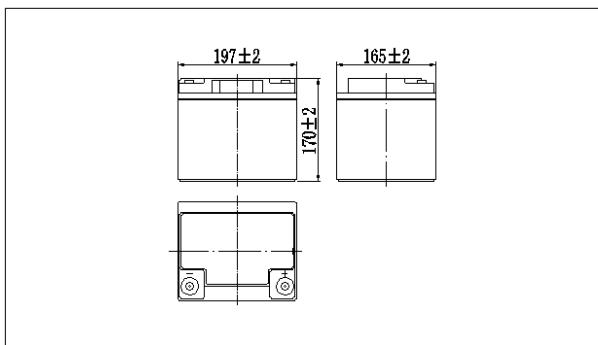

● **Terminal Type (mm)**

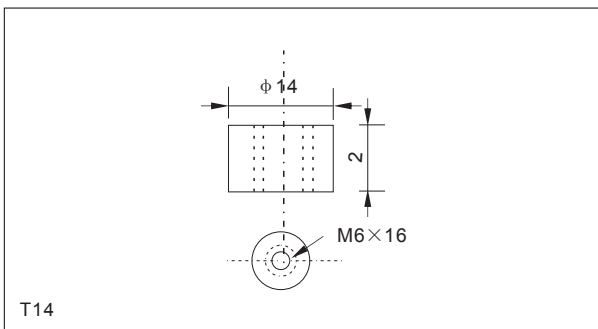

● **Characteristics**

Capacity (25°C)	10HR(10.8V)	45Ah
	3HR(10.8V)	33Ah
	1HR(10.5V)	25Ah
Terminal type		T14
Internal resistance (Fully charged,25°C)		Approx.7.5m Ω
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 months	Remaining Capacity:91%
	6 months	Remaining Capacity:82%
	12 months	Remaining Capacity:65%
Nominal operating temperature		25°C ±3°C(77°F ±5°F)
Operating temperature range	Discharge	-15°C~50°C(5°F~122°F)
	Charge	-10°C~50°C(14°F~122°F)
	Storage	-20°C~50°C(-4°F~122°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 15.00V Temperature compensation: -30mV/°C
Maximum charging current		13.5A
Maximum discharge current		400A(5 sec.)
Desigend floating life(20°C)		10years

● **Construction**

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

● **Constant Current Discharge Characteristics Unit:A(25°C,77°F)**

F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	98.1	75.6	45.2	27.8	16.4	11.8	9.46	8.08	5.55	4.58	2.43
9.90V	95.2	73.8	44.3	27.4	16.3	11.8	9.40	8.03	5.52	4.57	2.42
10.2V	91.2	71.1	43.0	26.7	16.2	11.7	9.33	7.98	5.48	4.56	2.42
10.5V	87.3	68.6	41.9	25.9	16.0	11.6	9.27	7.92	5.45	4.53	2.40
10.8V	82.4	65.0	40.4	25.0	15.6	11.3	8.99	7.68	5.28	4.50	2.39


● **Constant Power Discharge Characteristics Unit:W(25°C,77°F)**

F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	1059	830	507	317	190	139	111	95.5	66.0	54.7	29.1
9.90V	1028	810	497	312	189	138	111	94.9	65.6	54.6	29.1
10.2V	985	780	482	304	188	137	110	94.3	65.1	54.4	29.0
10.5V	943	754	470	295	185	137	109	93.6	64.7	54.1	28.8
10.8V	890	714	453	285	180	132	106	90.8	62.7	53.7	28.6


Note: The above characteristics data can be obtained within three charge or discharge cycles.

**NP12-45Ah 12V45Ah**

● Discharge characteristics(25°C)

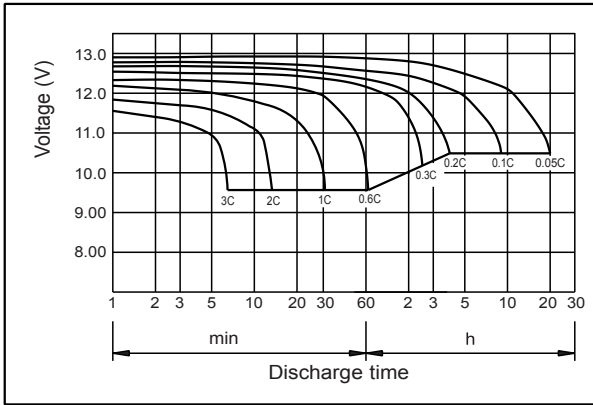


● Charging characteristics (25°C)

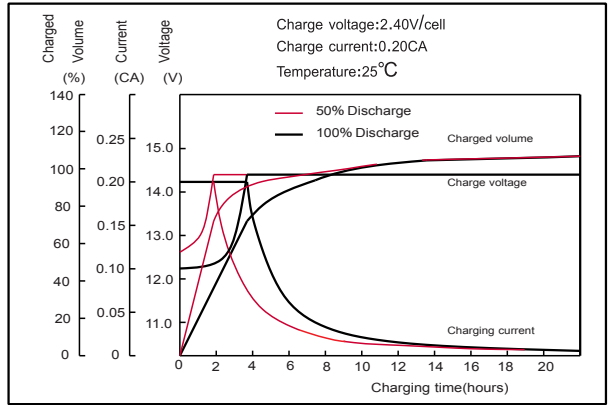


● Temperature effects on Capacity




● Self-discharge characteristics

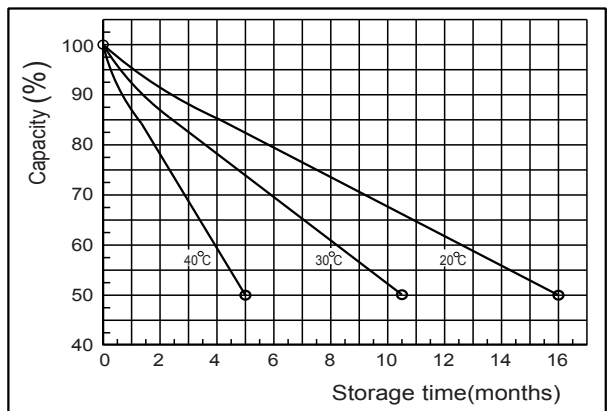


● Floating life on Temperature

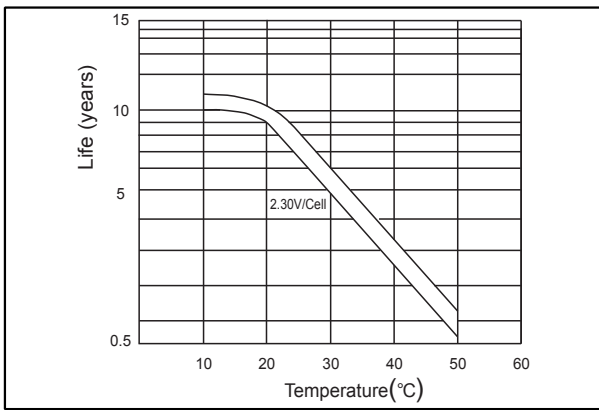

● Cycle life on D.O.D (25°C)

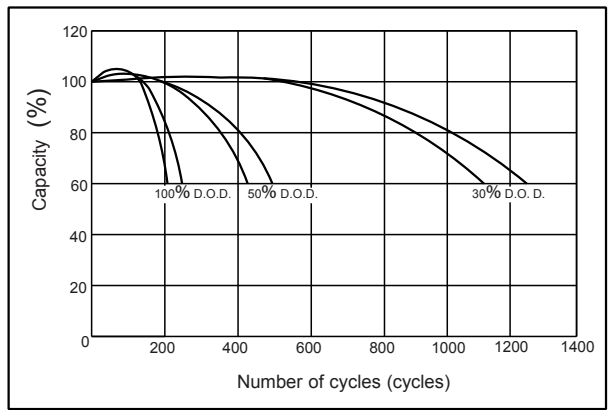

● The relationship for OCV and Capacity (25°C)

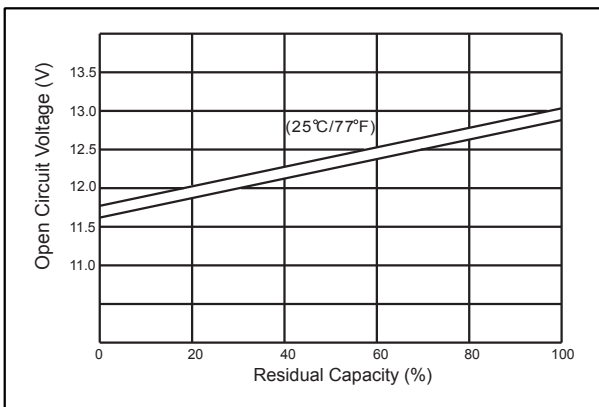

● The relationship for Charging voltage and Temperature

